



Development Review (Minor) Staff Approval

105-SA-2020

Perimeter Scottsdale -
Electric Vehicle Chargers

APPLICATION INFORMATION

LOCATION:	17600 N Perimeter Dr	APPLICANT:	Noe Ruiz Ramos
PARCEL:	215-07-230	COMPANY:	Burns & McDonnell
Q.S.:	37-47	ADDRESS:	nrramos@burnsmcd.com Phoenix, AZ 85004
ZONING:	I-1 PCD	PHONE:	(678) 650-7636

Request: Four Electric Vehicle (EV) charging stations with 200A service see Plan Check 2163-20

STIPULATIONS

1. The location and configuration of all site improvements shall be consistent with the site plan submitted by Burns & McDonnell, with a city staff date of 4/24/2020.
2. No landscaping shall be affected by this proposal.

CONSTRUCTION DOCUMENT PLAN REVIEW SUBMITTAL REQUIREMENTS

Submit one copy of this approval letter, a completed Owner/Builder form if applicable, and a permit application along with the following plan set(s) for digital review:

PERMIT APPLICATION: ☒ **Completed Permit Application**

The permit application may be filled-out and submitted online at:

<https://eservices.scottsdaleaz.gov/bldgresources/plans> or obtained for printing at:

- Commercial/Multi-family

Digital Plan submittals can be made using the City's e-Services at

<https://eservices.scottsdaleaz.gov/bldgresources/plans> and should include one PDF copy of each of the required plans/documents identified below.

ARCHITECTURAL/ELECTRICAL: ☒ 1 set of Commercial/Electrical Plans

Expiration of Development Review (Minor) Approval

This approval expires two (2) years from date of approval if a permit has not been issued, or if no permit is required, work for which approval has been granted has not been completed.

Staff Signature: _____

Wendy Hardy, 480-312-7938

Date: _____

4/24/2020

Planning and Development Services

7447 East Indian School Road, Suite 105, Scottsdale, Arizona 85251 ♦ www.ScottsdaleAZ.gov

PERIMETER SCOTTSDALE
PROPERTY, LLC
17600 N. PERIMETER DR.
SCOTTSDALE, AZ 85255
WA513145
APP# 240602

KEY NOTES:

- 1 (E) UTILITY TRANSFORMER #M99524: 300KVA, 3PH, 208/120V.
- 2 (N) METER MAIN LOAD CENTER, 200 A, 208/120 V. SEE E500 FOR DETAILS.
- 3 (N) 3" UNDERGROUND CONDUIT PER APS ESRM (APPROX. 40 FEET).
- 4 (N) CONDUIT AND POWER TO LEVEL 2 CHARGING STATIONS. (APPROX. 240 FEET) SEE E600 FOR SIZING. PAVEMENT TO BE REPLACED.
- 5 (E) PARKING CANOPY.

GENERAL NOTES:

- 1. UTILITY SHALL HAVE 24-HOUR UNRESTRICTED ACCESS TO ALL EVSE COMPONENTS AND SERVICE ENTRANCE.
- 2. PROPOSED TOTAL EV STALLS = 4
 - A. STANDARD STALLS = 3
 - B. ACCESSIBLE STALL = 1
 - C. STALLS LOST = 1
- 3. TOTAL EV CHARGING STATIONS = 4
 - A. DUAL PORT (PEDESTAL MOUNT) = 2
- 4. ACCESS TO PARKING STALLS ALONG CONDUIT LINE TO BE INTERMITTENTLY INACCESSIBLE DURING CONSTRUCTION.
- 5. CONDUIT ROUTING IS DIAGRAMMATICALLY SHOWN ON PLANS AND ARE ONLY APPROXIMATIONS. THE EXACT LOCATION AND ROUTING PATHS SHALL BE FIELD VERIFIED AND INSTALLED PER JURISDICTIONAL REQUIREMENTS.
- 6. ALL MATERIALS, EQUIPMENT, AND WIRING LOCATED OUTDOOR SHALL BE SUITABLE FOR WEATHERPROOF LOCATION.
- 7. TRAFFIC STRIPING TO BE REPAIRED WHEN DISTURBED. REFERENCE SITE PHOTOS.
- 8. SURVEY TO CONFIRM ANY CONFLICT WITH EXISTING UTILITIES.
- 9. CONTRACTOR TO NOTE EXISTING UNDERGROUND UTILITIES AND CONDUITS WHEN TRENCHING.
- 10. ALL EQUIPMENT, CONDUIT AND FEEDERS TO BE INSTALLED INSIDE APS EASEMENT.
- 11. STRIPING TO MATCH PLAN DETAILS.

Contact Arizona 811 at least two full working days before you begin excavation


Call 811 or click Arizona811.com

APS SYMBOLS LEGEND	
	APS TRANSFORMER
	APS ELECTRICAL SERVICE TO SES
	200 A METER PANEL WITH SERVICE DISCONNECT SWITCH
	ELECTRICAL SERVICE TO EVSE, DEDICATE CIRCUIT PER EVSE
	DUAL PORT EVSE
	WHEEL STOP

CITY OF SCOTTSDALE APPROVAL

105-sa-2020

APPROVED
FINAL PLANS PLANNING

4/24/2020

DATE

Wendy Hardy
APPROVED BY

STAMP LOCATION



CONTACT: LISA SCHAEFFER			
PHONE: 602-250-2049		PGR/MOBILE: 480-375-0975	
INSPECTOR: GREG DAVIS			
PHONE: -		PGR/MOBILE: 480-721-8390	
2	04/15/20	REVISED FOR NEW DESIGN	TJG
1	04/07/20	REVISED TO STAY IN PROPERTY	TJG
0	03/13/20	ISSUED FOR PERMIT	TJG
NO.	DATE	DESCRIPTION	BY
APS TAKE CHARGE - 112.5 KW, 120/208 V PERIMETER SCOTTSDALE PROPERTY, LLC 17600 N. PERIMETER DR. SCOTTSDALE, AZ 85255 SITE PLAN			
			
WO#: WA513145		DATE: DECEMBER 11, 2019	
BY: SR		SCALE: 1"=20'-0"	
APS DWG #: -		VENDOR #: E100	

PERIMETER SCOTTSDALE
PROPERTY, LLC
17600 N. PERIMETER DR.
SCOTTSDALE, AZ 85255
WA513145
APP# 240602


KEY NOTES:

- 1 (N) CONDUIT AND POWER TO LEVEL 2 CHARGING STATIONS. (APPROX. 72 FEET) SEE E600 FOR SIZING. PAVEMENT AND SIDEWALK TO BE REPLACED. CONDUIT ROUTING SHOULD AVOID EXISTING LANDSCAPE FEATURE WHERE POSSIBLE.
- 2 (N) DUAL PORT LEVEL 2 PEDESTAL CHARGING STATIONS. SEE E500 FOR DETAIL. INSTALL AT INTERSECTION OF PARKING STALL STRIPING. PROVIDE 12 INCHES CLEAR SPACE BETWEEN CHARGER FOUNDATIONS.
- 3 (N) WHEEL STOP TO BE PLACED 2 FEET IN FRONT OF EVSE. SEE GENERAL NOTE 1, THIS SHEET.
- 4 (N) LETTERING ON PARKING SPACES TO BE 12 INCHES IN HEIGHT PAINTED IN REFLECTIVE WHITE UNLESS SURFACE IS CONCRETE THAN LETTER TO BE GREEN.
- 5 (E) PARKING CANOPY.
- 6 (E) REMOVE EXISTING STRIPING AS REQUIRED.

GENERAL NOTES:

1. PREFABRICATED CONCRETE PARKING BARRIERS, WHERE USED, SHALL BE A MINIMUM OF 9 INCHES WIDE, 5 INCHES HIGH, AND 3 OR 6 FEET LONG. PREFABRICATED BARRIERS MUST BE FIRMLY AND PERMANENTLY ANCHORED A MINIMUM OF 12 INCHES BELOW THE PAVEMENT WITH GALVANIZED ANCHOR PINS.
2. ALL EQUIPMENT, CONDUIT AND FEEDERS TO BE INSTALLED INSIDE APS EASEMENT.
3. STRIPING TO MATCH PLAN DETAILS.

1 ENLARGED SITE PLAN
Scale: 1" = 10'-0"

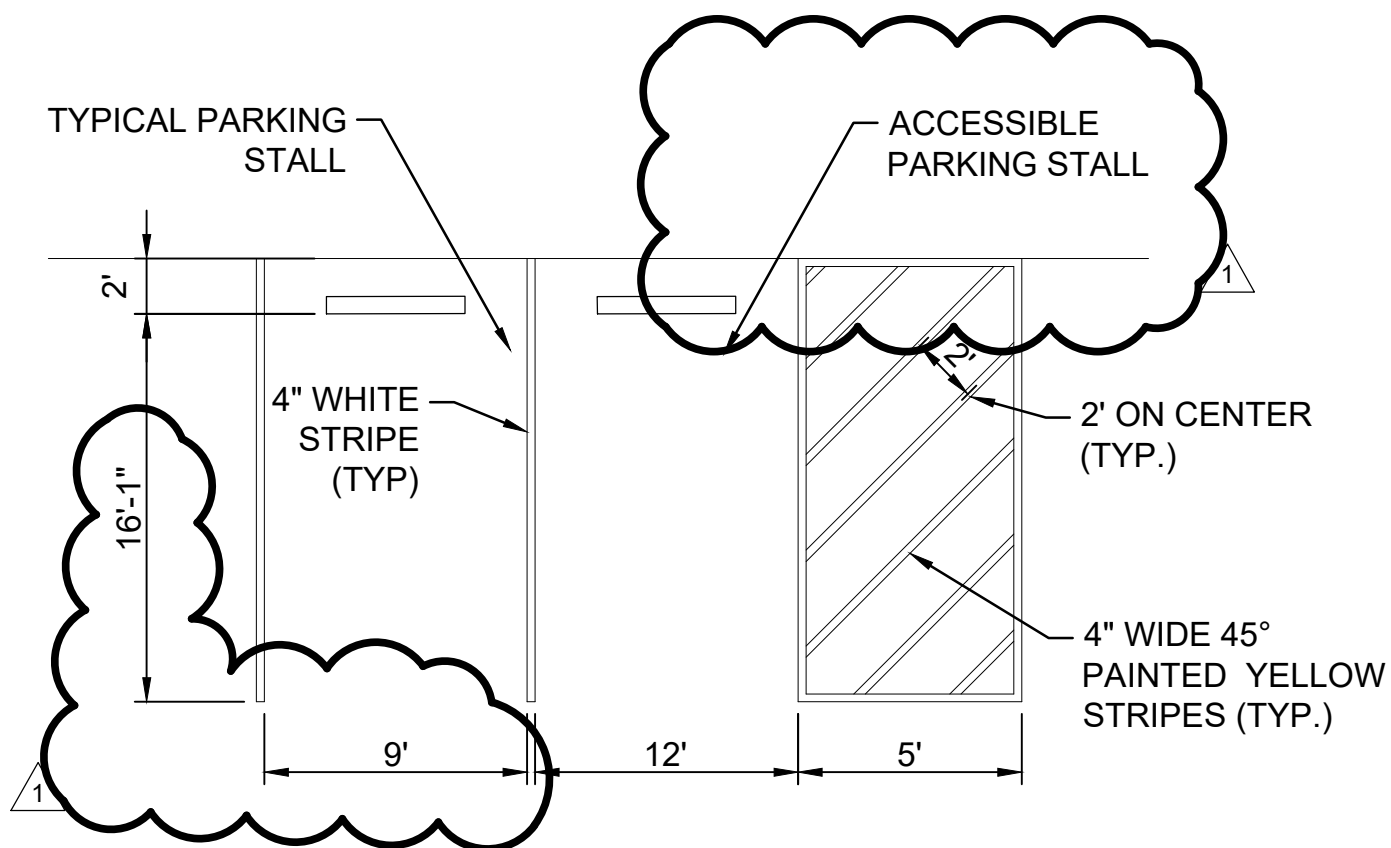

2 ACCESSIBLE PARKING LAYOUT DETAIL
Scale: NTS

DETAIL NOTES:

1. ALL PAVEMENT MARKINGS SHALL BE PER THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS (ANSI D 6.1e).
2. ACCESS AISLE STRIPING COLOR SHALL BE YELLOW, 4" STROKE, PAINTED IN A DIAGONAL PATTERN 24" ON CENTER, WITH A SINGLE HORIZONTAL STRIPE AT THE REAR END OF THE AISLE.
3. ACCESS AISLE SHALL TRANSITION TO THE ADJACENT PARKING STALL(S) AND THE ADJACENT ACCESSIBLE ROUTE, AT THE SAME ELEVATION.
4. WHERE CURB RAMPS CONNECT PARKING ACCESS AISLES TO RAISED SIDEWALKS, CURB RAMPS SHALL BE INSTALLED IN THE SIDEWALK AND NOT WITHIN THE ACCESS AISLE.
5. SLOPE OF PARKING STALL SHALL NOT EXCEED 2% IN ANY DIRECTION.
6. STRIPING COLOR SHALL BE WHITE, 4" STROKE, FOR THE LINE ADJACENT TO REGULAR PARKING SPACE.

Contact Arizona 811 at least two full working days before you begin excavation



Call 811 or click Arizona811.com

APS SYMBOLS LEGEND

	APS TRANSFORMER
	APS ELECTRICAL SERVICE TO SES
	200 A METER PANEL WITH SERVICE DISCONNECT SWITCH
	ELECTRICAL SERVICE TO EVSE, DEDICATE CIRCUIT PER EVSE
	DUAL PORT EVSE
	WHEEL STOP

CITY OF SCOTTSDALE APPROVAL


STAMP LOCATION

CONTACT: LISA SCHAEFFER			
PHONE: 602-250-2049		PGR/MOBILE: 480-375-0975	
INSPECTOR: GREG DAVIS			
PHONE: -		PGR/MOBILE: 480-721-8390	
1	04/15/20	REVISED FOR NEW DESIGN	TJG
0	03/13/20	ISSUED FOR PERMIT	TJG
NO.	DATE	DESCRIPTION	BY
APS TAKE CHARGE - 112.5 KW, 120/208 V PERIMETER SCOTTSDALE PROPERTY, LLC 17600 N. PERIMETER DR. SCOTTSDALE, AZ 85255 ENLARGED SITE PLAN AND DETAILS			
WO#:	WA513145	DATE:	DECEMBER 11, 2019
BY:	SR	SCALE:	AS NOTED
APS DWG #:	-	VENDOR #:	E101

PERIMETER SCOTTSDALE
PROPERTY, LLC
17600 N. PERIMETER DR.
SCOTTSDALE, AZ 85255
WA513145
APP# 240602

NOTES:

- CONTRACTOR SHALL VERIFY ALL UTILITY COMPANY REQUIREMENTS PRIOR TO TRENCHING.
- CONTRACTOR SHALL PROVIDE FOR AND COORDINATE ALL TESTING AND INSPECTIONS REQUIRED BY THE AUTHORITY HAVING JURISDICTION.
- CLEARANCES AROUND ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.26.
- UPON SUBSTANTIAL COMPLETION, THE CONTRACTOR SHALL NOTIFY APS AND THE ENGINEER FOR THE INSPECTION OF NEW WORK PRIOR TO ENERGIZING.
- THE ELECTRICAL CONTRACTOR SHALL PROVIDE MAXIMUM AVAILABLE FAULT CURRENT FIELD LABELING TO SERVICE EQUIPMENT INSTALLED AT OTHER THAN DWELLING UNITS IN ACCORDANCE WITH NEC 110.24
- CONTRACTOR SHALL SELECT BRANCH BREAKERS TO MAINTAIN SERIES RATINGS FOR TESTED SERIES COMBINATION SYSTEMS. AT DISCONNECTING MEANS VISIBLY AND READILY MARK WITH LABELS AS REQUIRED BY NEC ARTICLE 110.22 AND 240.86(B).

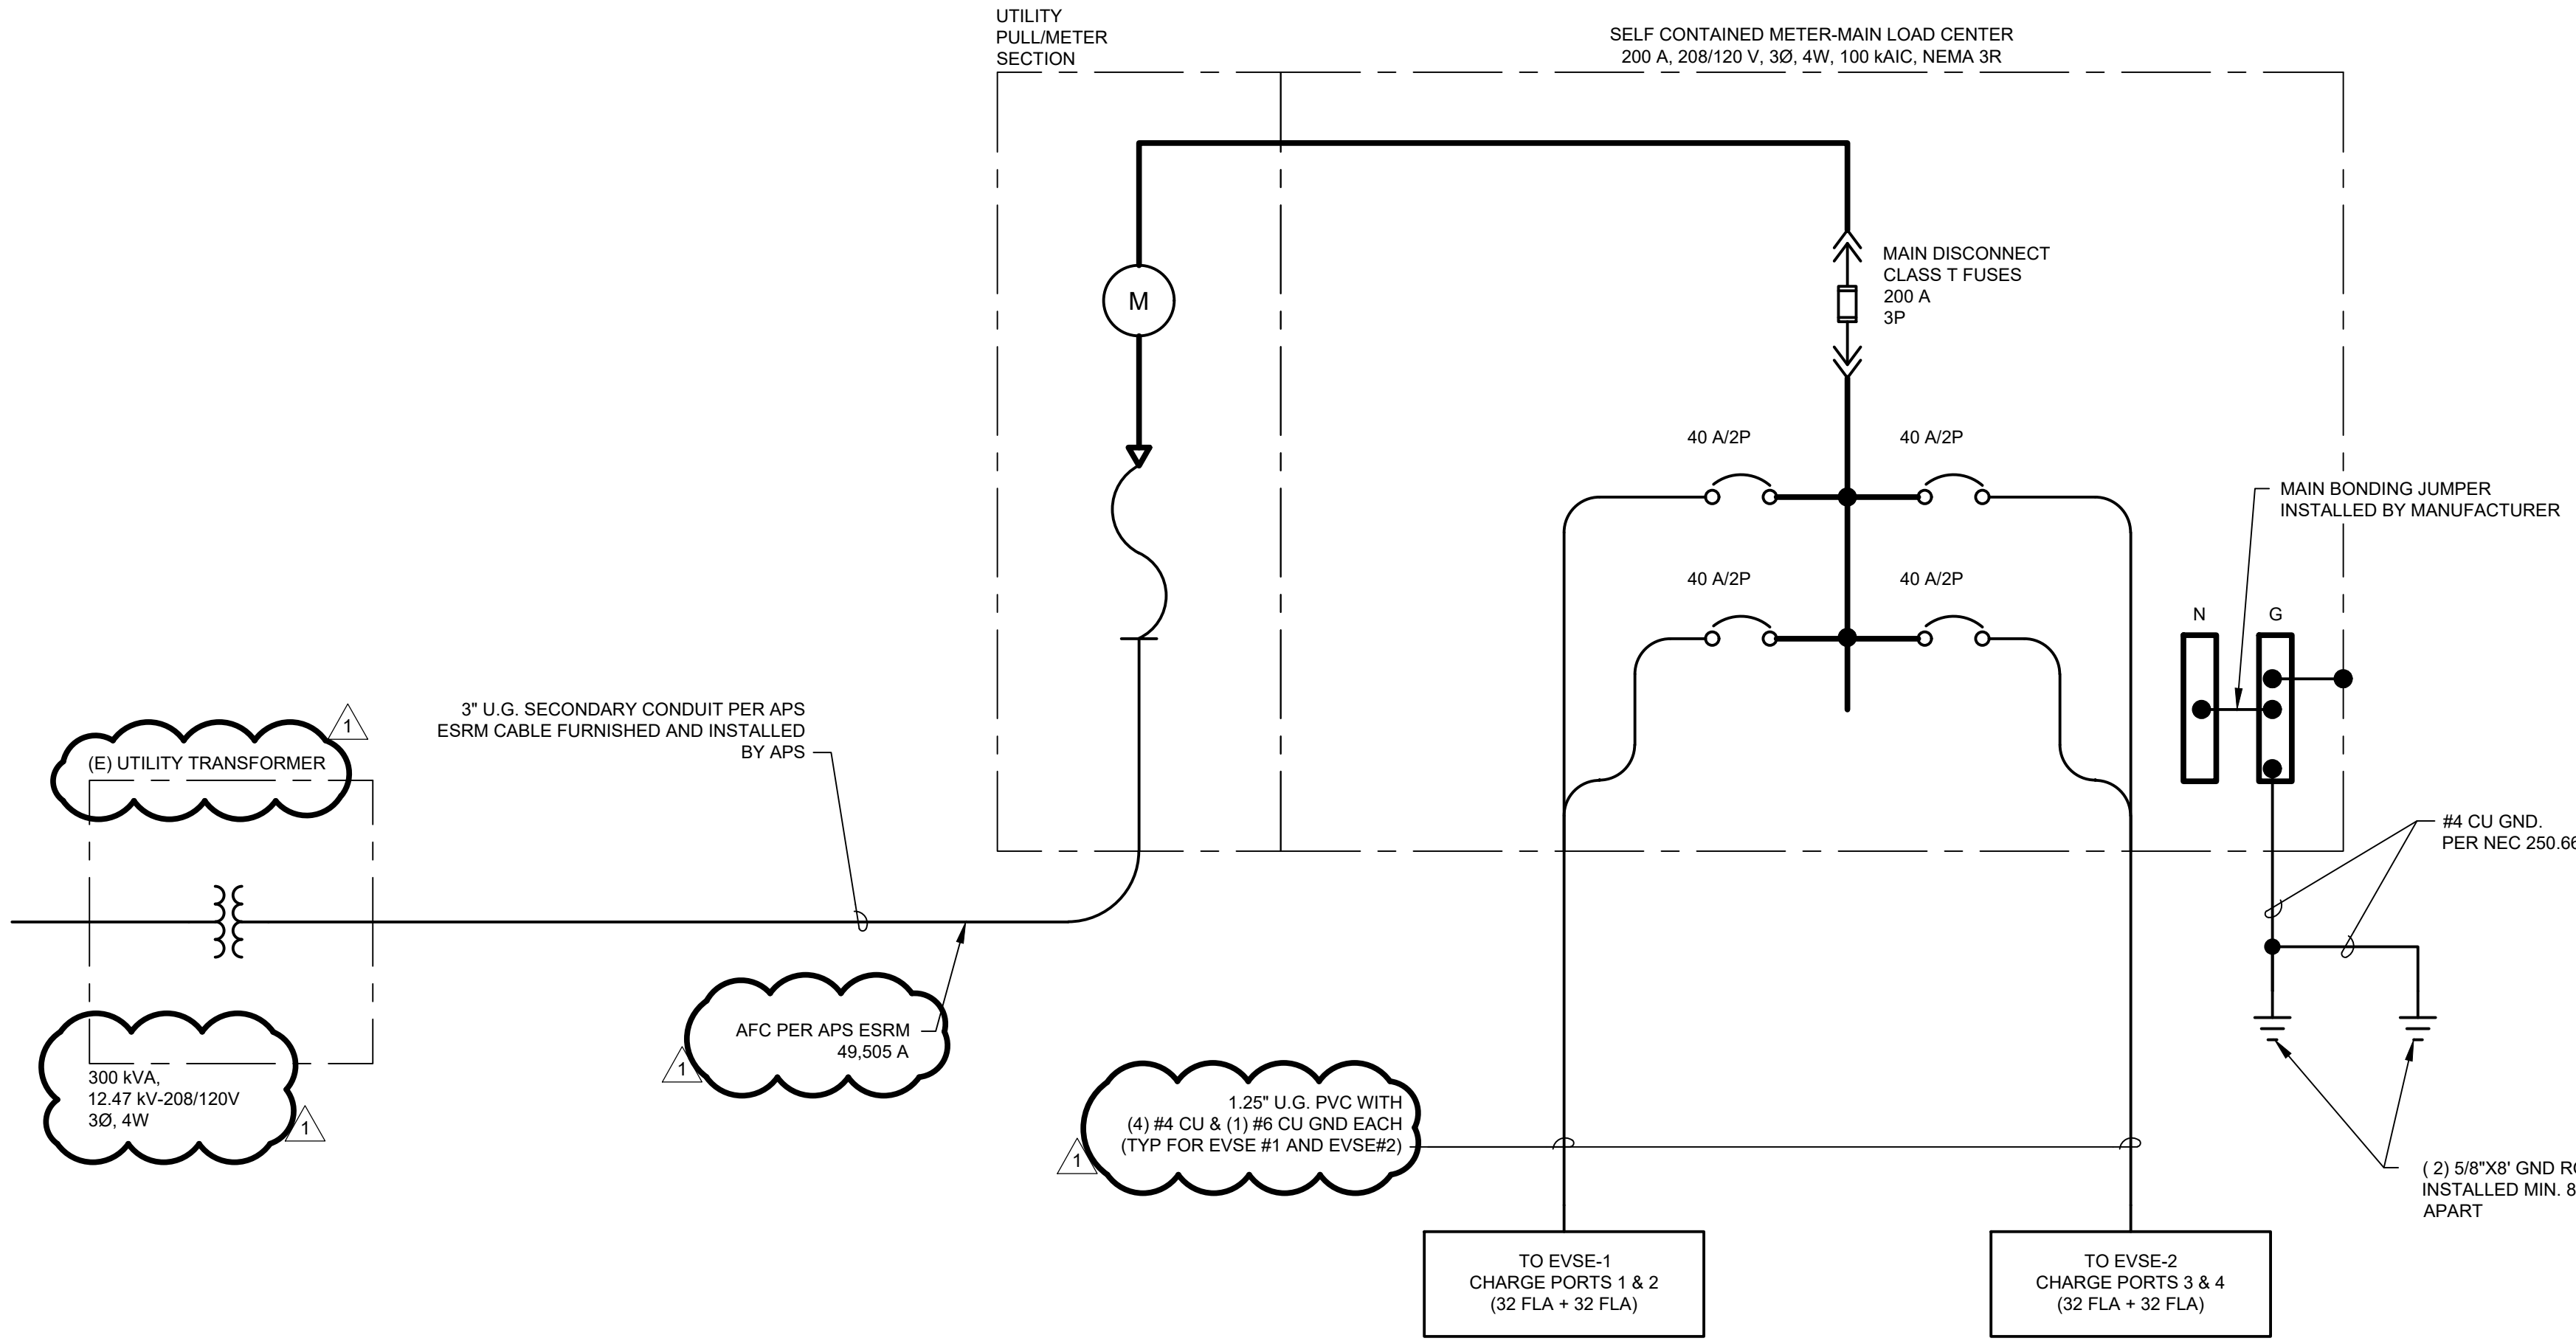

ONE-LINE DIAGRAM

SCALE: NTS

PANEL TAG No. PNL EV01		NEMA TYPE/MOUNTING 3R/SURFACE	
LOCATION NORTH PARKING LOT		MAIN DEVICE 200A FUSIBLE DISCONNECT	
BUS AMPACITY 200A		AIC RATING 100KA	
VOLTS 208		FED FROM UTILITY TRANSFORMER	
PHASE/WIRE CONFIG. 3-PHASE/4-WIRE			

LOAD VA			LOAD DESCRIPTION	DEMAND	BKR	BKR. NO.		BKR	DEMAND	LOAD DESCRIPTION	LOAD VA		
PHASE	PHASE	PHASE									PHASE	PHASE	PHASE
A	B	C									A	B	C
3328			CHARGE PORT 1	1.00	40/2	1	2				0		
	3328			1.00		3	4	40/2	1.00	CHARGE PORT 3		3328	
		3328	CHARGE PORT 2	1.00	40/2	5	6		1.00				3328
3328				1.00		7	8	40/2	1.00	CHARGE PORT 4	3328		
	0					9	10		1.00			3328	
0		0				11	12						0
	0					13	14				0		
		0				15	16					0	
0						17	18						0
	0					19	20				0		
		0				21	22					0	
						23	24						0
6656	3328	3328	CONNECTED VA							CONNECTED VA	3328	6656	3328
6656	3328	3328	DEMAND VA							DEMAND VA	3328	6656	3328

TOTAL PANEL CONNECTED LOAD	VA	AMPS	TOTAL CONNECTED VA - PER PHASE	9984	9984	6656
	26624	73.90		9984	9984	6656
	TOTAL PANEL DEMAND LOAD	26624		83.1	83.1	55.4
	PANEL DEMAND FACTOR	100%				

PANEL SCHEDULE - EV01


SCALE: NTS

CHARGER PANEL FEEDER SCHEDULE										
EVSE CB (A)	MAX DISTANCE (FT)	MAX CURRENT (A)	VOLTAGE	PHASE	WIRE SIZE	INSULATION	MATERIAL	PERCENT LOSS	GROUND SIZE	CONDUIT SIZE
40	364	32	240	1	4	THWN-2	CU	3.0%	6	1.25"

CABLE AND CONDUIT SCHEDULE

SCALE: NTS

Contact Arizona 811 at least two full working days before you begin excavation

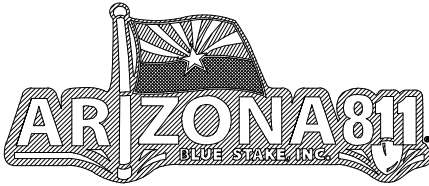


Call 811 or click Arizona811.com

CITY OF SCOTTSDALE APPROVAL

STAMP LOCATION

BURNS MEDONNELL

CONTACT: LISA SCHAEFFER			
PHONE: 602-250-2049		PGR/MOBILE: 480-375-0975	
INSPECTOR: GREG DAVIS			
PHONE: -		PGR/MOBILE: 480-721-8390	
1	04/15/20	REVISED FOR NEW DESIGN	TJG
0	03/13/20	ISSUED FOR PERMIT	TJG
NO.	DATE	DESCRIPTION	BY
APS TAKE CHARGE - 112.5 KW, 120/208 V PERIMETER SCOTTSDALE PROPERTY, LLC 17600 N. PERIMETER DR. SCOTTSDALE, AZ 85255 ELECT. ONE-LINE, PANEL SCHEDULE. & CABLE CONDUIT LIST			
aps			
WO#:	WA513145	DATE:	DECEMBER 11, 2019
BY:	SR	SCALE:	N/A
APS DWG #:	-	VENDOR #:	E600

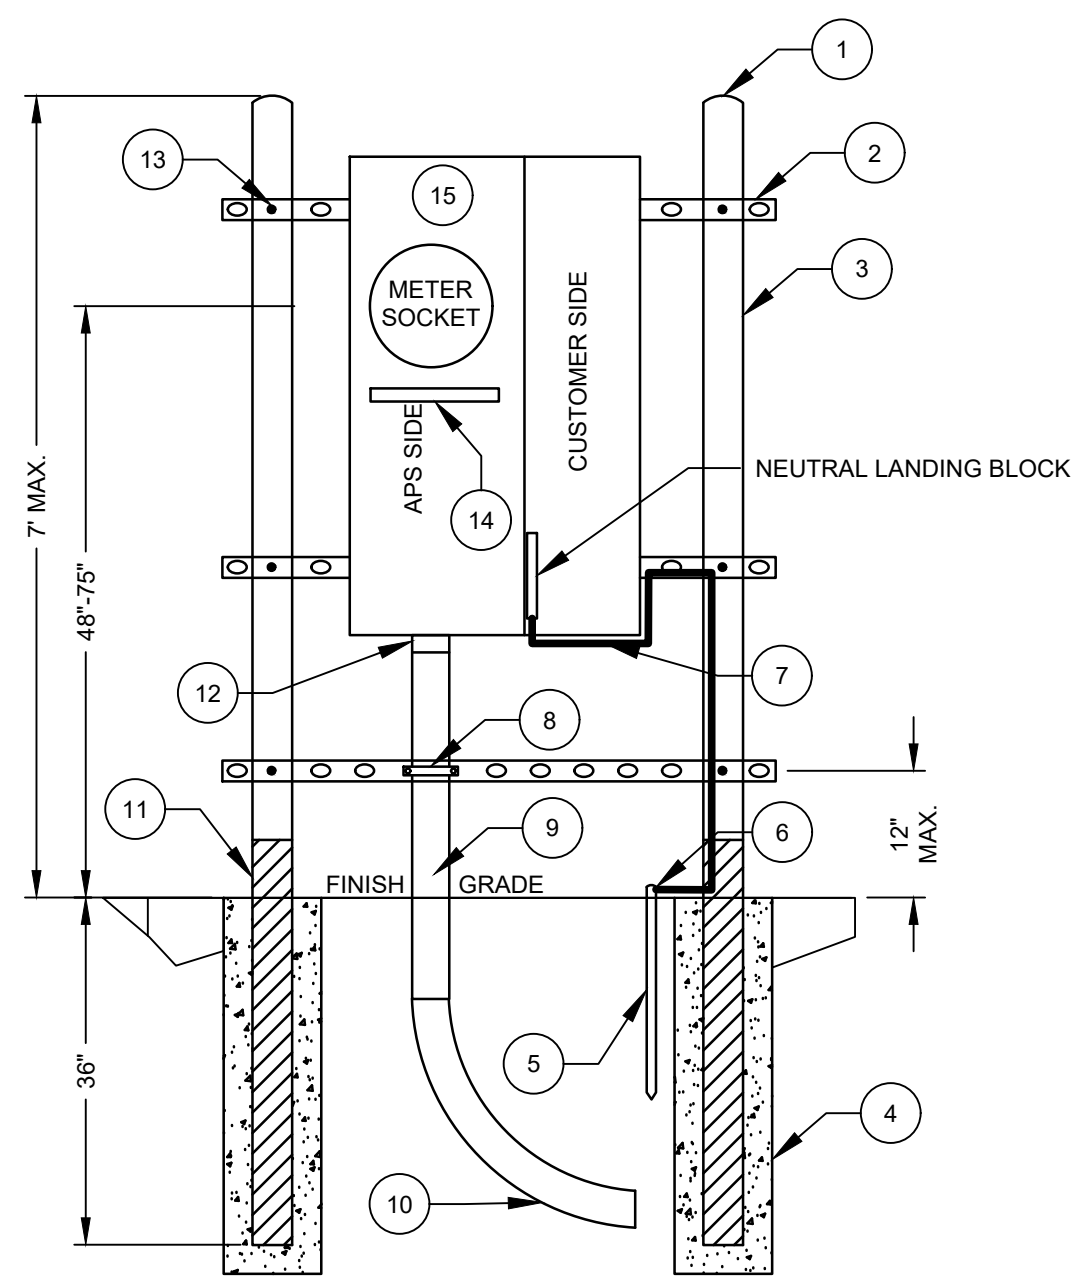

KEY NOTES:


- 1 ALL STEEL POSTS MUST BE CAPPED
 - 2 STEEL UNISTRUT SUPPORTS (TYP OF 3)
 - 3 THREE INCH DIAMETER RIGID GALVANIZED STEEL POSTS MINIMUM (MAXIMUM LENGTH = 10'). THERE SHALL BE NO WELDS OR COUPLINGS IN STEEL POSTS. (TYP OF 2)
 - 4 POSTS SHALL BE PLACED IN THE CENTER OF A 12" MINIMUM DIAMETER CONCRETE FOOTING. THE FOOTING SHALL BE A MINIMUM OF 36" IN THE GROUND AND EXTEND A MINIMUM OF 4" ABOVE GROUND LEVEL AND HAVE A 1/2" SLOPE AWAY FROM THE POST TO ALLOW FOR DRAINAGE.
 - 5 (2) - 5/8"x8" GROUND RODS SHALL BE POSITIONED IN A PLACE WHERE IT DOES NOT POSE A TRIPPING HAZARD TO APS OR THE PUBLIC. THERE SHALL BE A MAINTAINED 3'x3' CLEAR FLAT SAFE WORKING SPACE IN FRONT OF METERING EQUIPMENT.
 - 6 ACORN CLAMP REQUIRED AT CONNECTION. GROUNDING SHALL BE PROVIDED BY THE CUSTOMER IN COMPLIANCE WITH NEC AND ARIZONA PUBLIC SERVICE. MAX ELECTRODES SHALL HAVE A RESISTANCE-TO-GROUND OF NOT MORE THAN 25 OHMS.
 - 7 GROUND WIRE SHALL BE A MINIMUM SIZE OF #4 SOLID COPPER.
 - 8 RISERS SHALL BE SECURELY FASTENED TO UNISTRUT BY AT LEAST ONE STRAP AND THE SERVICE EQUIPMENT ENCLOSURE. THE STRAP SHALL BE LOCATED 1/3 THE DISTANCE UP FROM FINISH GRADE BETWEEN THE RISER ENTRANCE TO THE SERVICE EQUIPMENT AND FINISHED GRADE (200 AMP SES - 2 1/2") (400 AMP SES - 3")
 - 9 UNDERGROUND RISERS SHALL BE RIDGED STEEL OR SCHEDULE 80 PVC AND NOT HAVE ANY PVC COUPLINGS ABOVE GRADE EXCEPT FOR THE CONNECTION AT THE PANEL. THREADED RIGID STEEL RISER SHALL NOT BE CUT WITH A TORCH, WELDED, BRAZED, OR CONTAIN ANY COMPRESSION COUPLINGS. ONLY TRUE ROUND CROSS-SECTION RISERS WILL BE ACCEPTABLE. RISERS SHALL BE PLUMB WITH NO KICKS OR BENDS.
 - 10 RIGID STEEL RISER OR SCHEDULE 40, 24" RADIUS ELBOW ARE ACCEPTABLE. IF ELBOW IS STEEL THE PORTION OF THE STEEL RISER BELOW GRADE, UP TO A MINIMUM OF 6" ABOVE GRADE, SHALL BE HALF-LAPPED WITH 20 MIL. TAPE SUITABLE FOR ITS USE. TO A TOTAL THICKNESS OF 40 MIL. THE TAPE SHALL BE LABELED TO INCLUDE THE THICKNESS (20 MIL.) AND THE MANUFACTURER'S NAME OR FACTORY COATED. IF RISER IS FACTORY COATED, IT SHALL HAVE A UL LABEL. THE COUPLER CONNECTING THE PVC CONDUIT SYSTEM TO THE STEEL ELBOW SHALL ALSO BE TAPED. SEE THIS SHEET FOR DETAIL 4 ON CONDUIT DEPTH REQUIREMENTS.
 - 11 ALL STEEL POSTS USED FOR PANEL SUPPORTS MUST BE HALF-LAPPED WITH 20 MIL. TAPE SUITABLE FOR ITS USE, TO A TOTAL THICKNESS OF 40 MIL. UP TO A MINIMUM OF 6" ABOVE GRADE. THE TAPE SHALL BE LABELED TO INCLUDE THE THICKNESS (20 MIL.) AND THE MANUFACTURER'S NAME.
 - 12 FACTORY BOLT-ON HUB IS PREFERRED. ALL RISER KNOCK OUTS SHALL BE REMOVED BEFORE ANY RISER ATTACHMENT IS MADE. REDUCER WASHERS SHALL BE INSTALLED ON THE INSIDE AND OUTSIDE OF THE SECTION WHENEVER A SELF-BONDING HUB IS NOT USED. SCHEDULE 80 PVC CONDUIT RISERS SHALL BE SECURED TO THE PULL SECTION USING A THREADED MALE SLIP-SLEEVE CONNECTOR AND A STEEL LOCK NUT. STEEL CONDUIT RISERS SHALL BE SECURED TO THE PULL SECTION USING A RISER "HUB" WITH A BONDABLE LOCK NUT/BUSHING. A FACTORY BOLT-ON HUB, OR A SELF-BONDING HUB (MYERS OR EQUIVALENT).
 - 13 ALL BOARDS, STEEL, AND UNISTRUT SHALL BE ATTACHED TO THE POLE OR POST SECURELY WITH A MINIMUM 1/2" GALVANIZED THROUGH BOLT WITH AN 1-1/2" GALVANIZED BACKING AND A LOCK NUT. NAILS OR LAG SCREWS WILL NOT BE ACCEPTED.
 - 14 RIVETED NON-FERROUS METAL ADDRESS LABEL. SEE 302.1 OF ESRM FOR LABEL REQUIREMENTS.
 - 15 APS APPROVED PANEL MEETING EUSERC 305 REQUIREMENTS. SHALL BE SECURELY FASTENED TO STEEL WITH A MINIMUM 1/4" THROUGH BOLTS.

1 TYPICAL STAND ALONE SUPPORT FOR SES

Scale: N.T.S

NOTE:

1. THE CONDUIT MUST BE AT LEAST 1/2" IN DIAMETER AND EXTEND 12" TO 24" ABOVE THE CONCRETE.

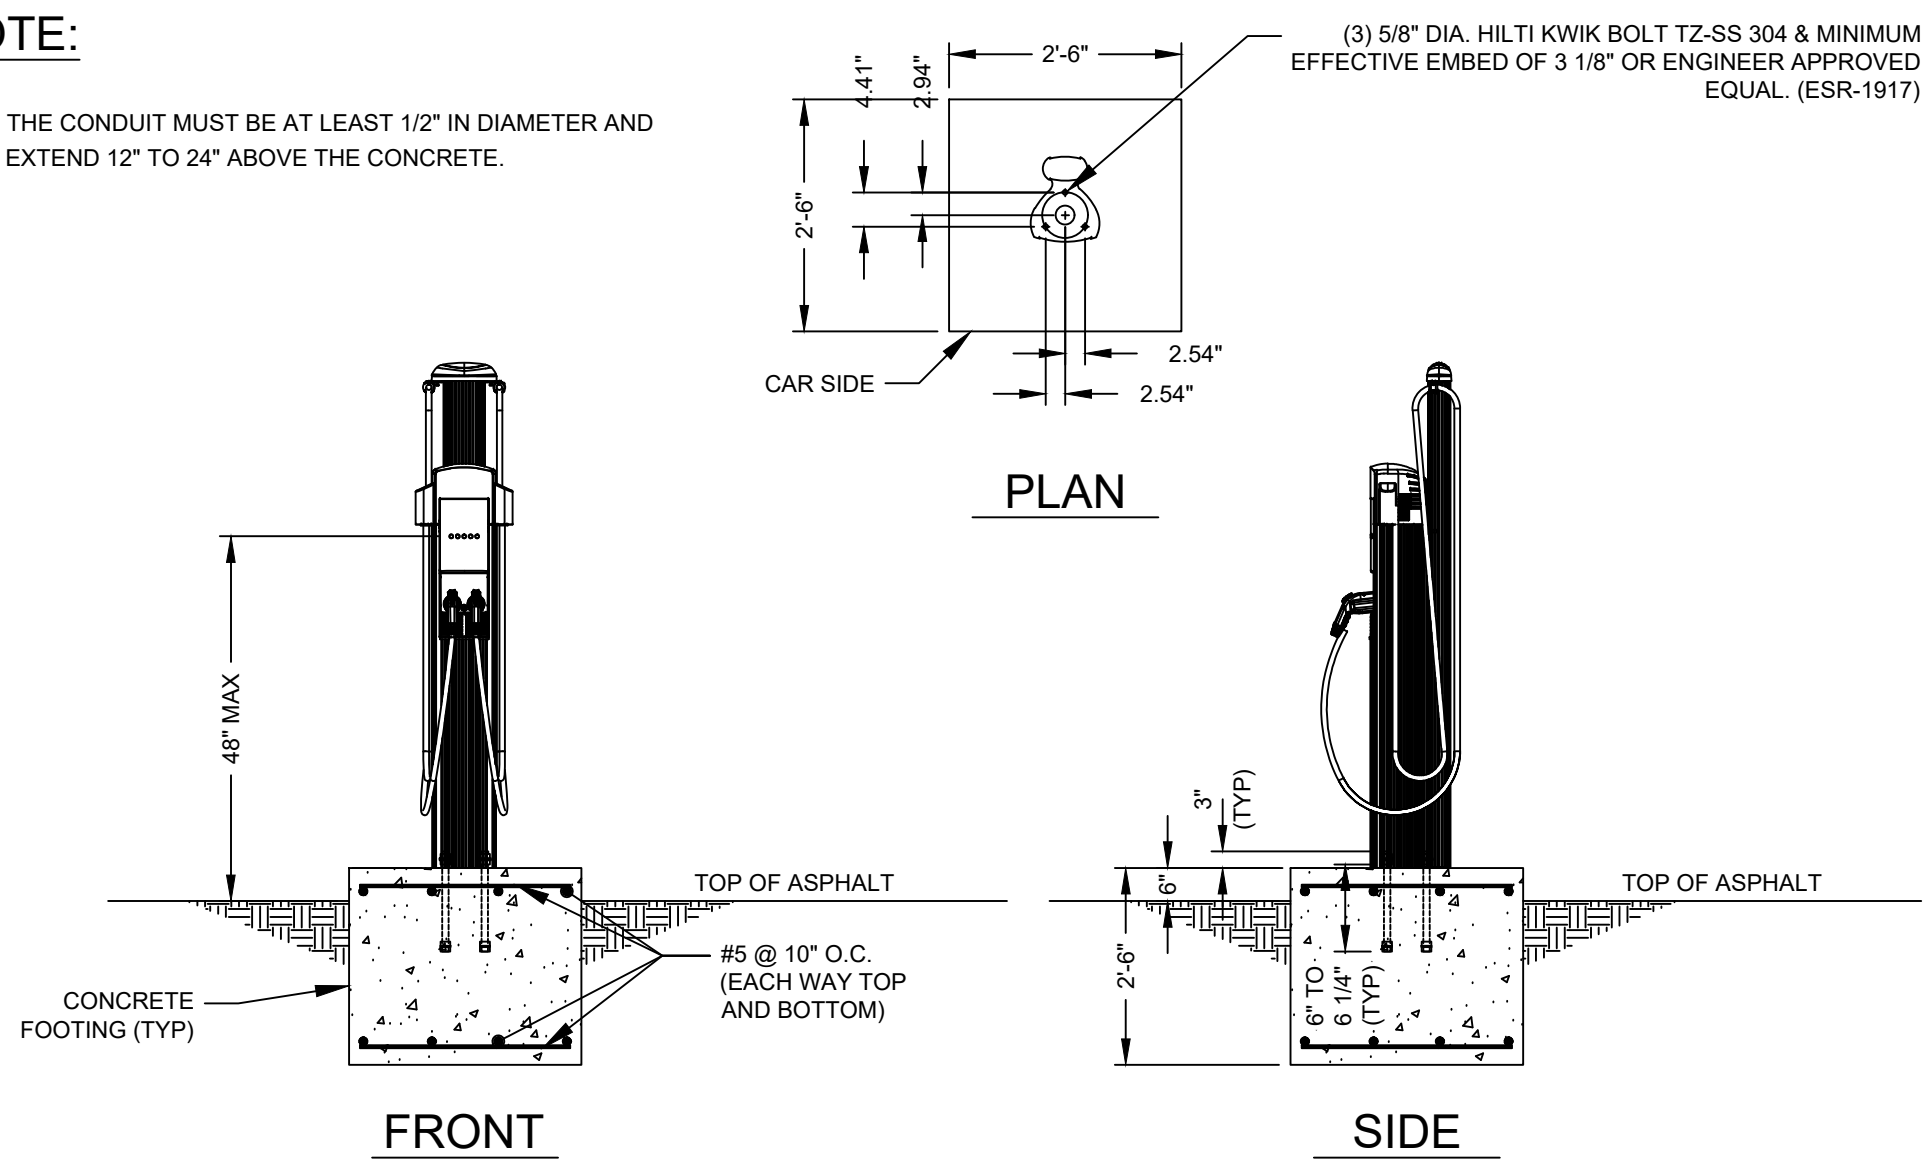


CHARGER SPECIFICATIONS:


CHARGE MANUFACTURER	CHARGEPOINT
CHARGING POWER	32A (7.7KW MAX)
INSTALLATION	HARDWIRED
SUPPLY CIRCUIT	208/240V, 40A
CHARGE CABLE LENGTH	18 FEET
VEHICLE CONNECTOR TYPE	LOCKABLE SAE J1772
ENCLOSURE	TYPE 3R PER UL 50E
OPERATING TEMPERATURE	-40°C TO 50°C (-40°F TO 122°F)
CERTIFICATIONS	UL, CUL

NOTES:

1. THE LOCATION OF THE CONDUIT STUB-UP IS CENTERED WITH RESPECT TO THE CONCRETE FOUNDATION. CONDUIT SHALL EXTEND 12 INCHES ABOVE THE FINISHED FOUNDATION.
2. ALL HARDWARE SHALL BE GALVANIZED.
3. MINIMUM 28-DAY CONCRETE COMPRESSIVE STRENGTH (fc) OF 4,000 PSI.
4. REPAIR ASPHALT AROUND PERIMETER OF NEW FOUNDATION.
5. ORIENT ANCHOR BOLTS PER PLAN ON E100.
6. REFER TO THE MANUFACTURER INSTALLATION GUIDE FOR DETAILED INSTALLATION INSTRUCTIONS.

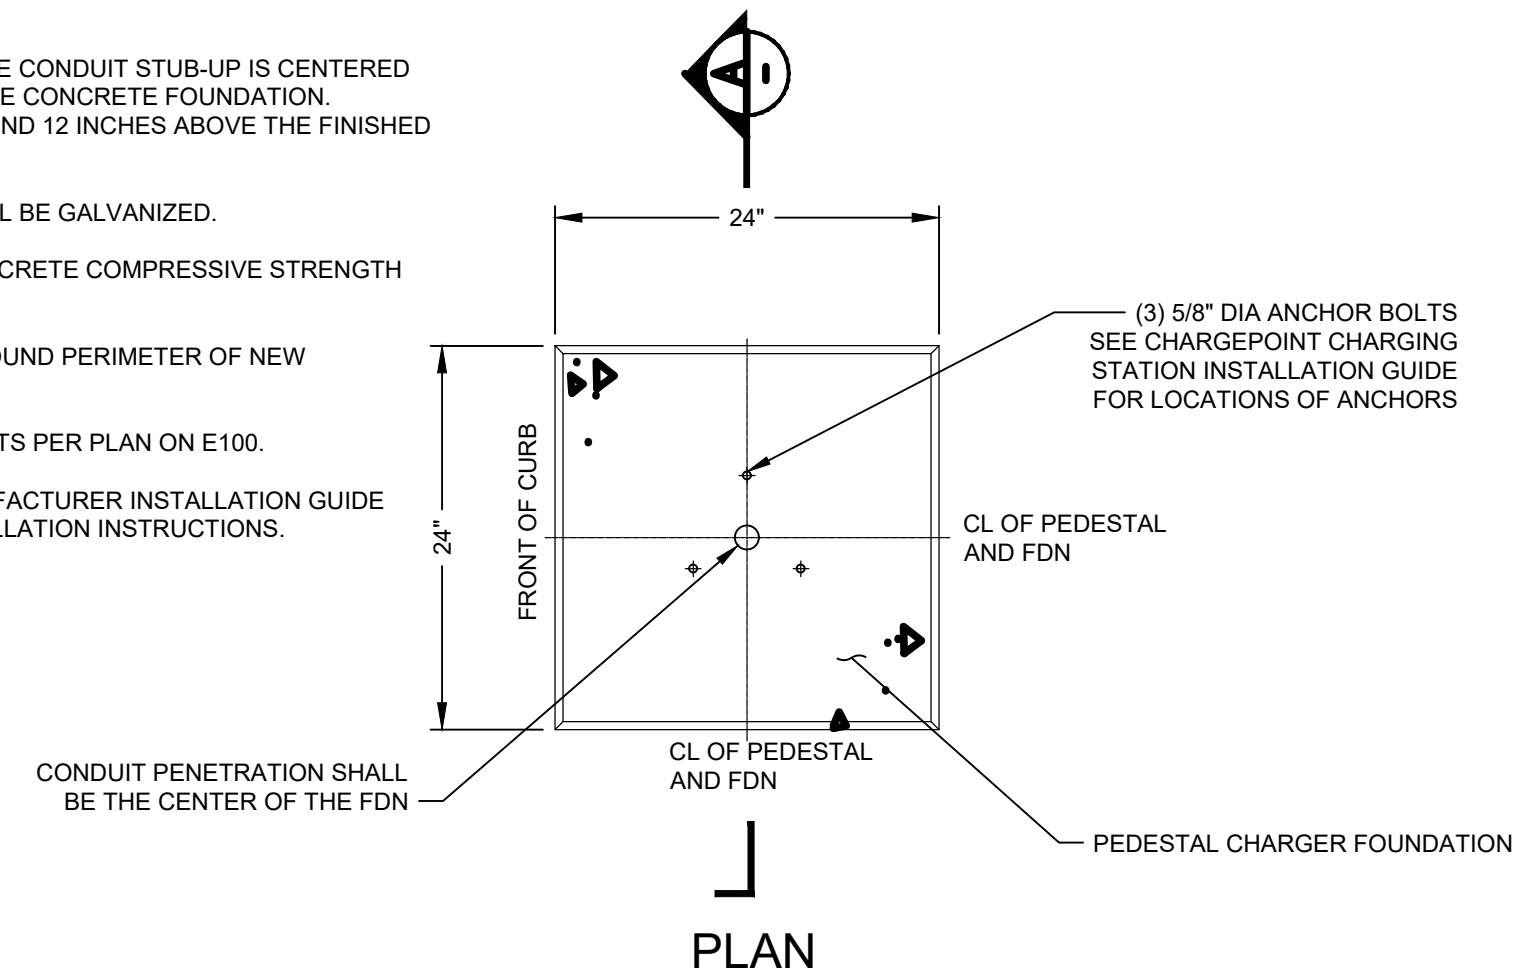


SECTION A

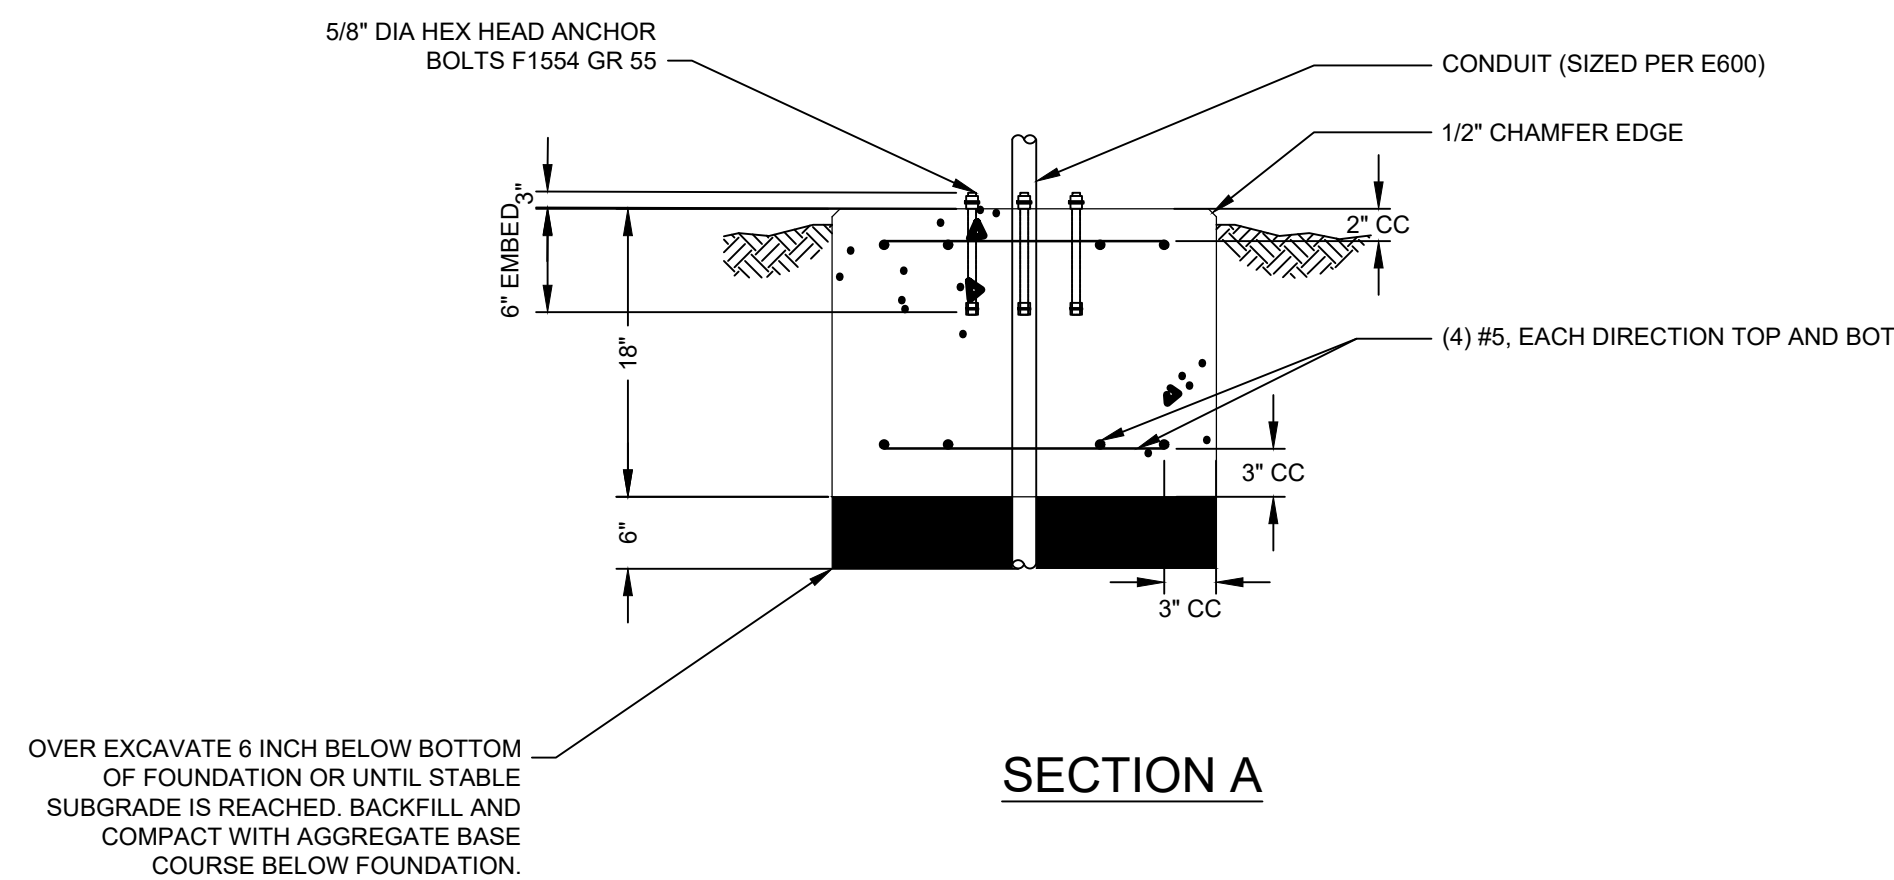

BOLLARD CHARGER FOUNDATION

Scale: NTS

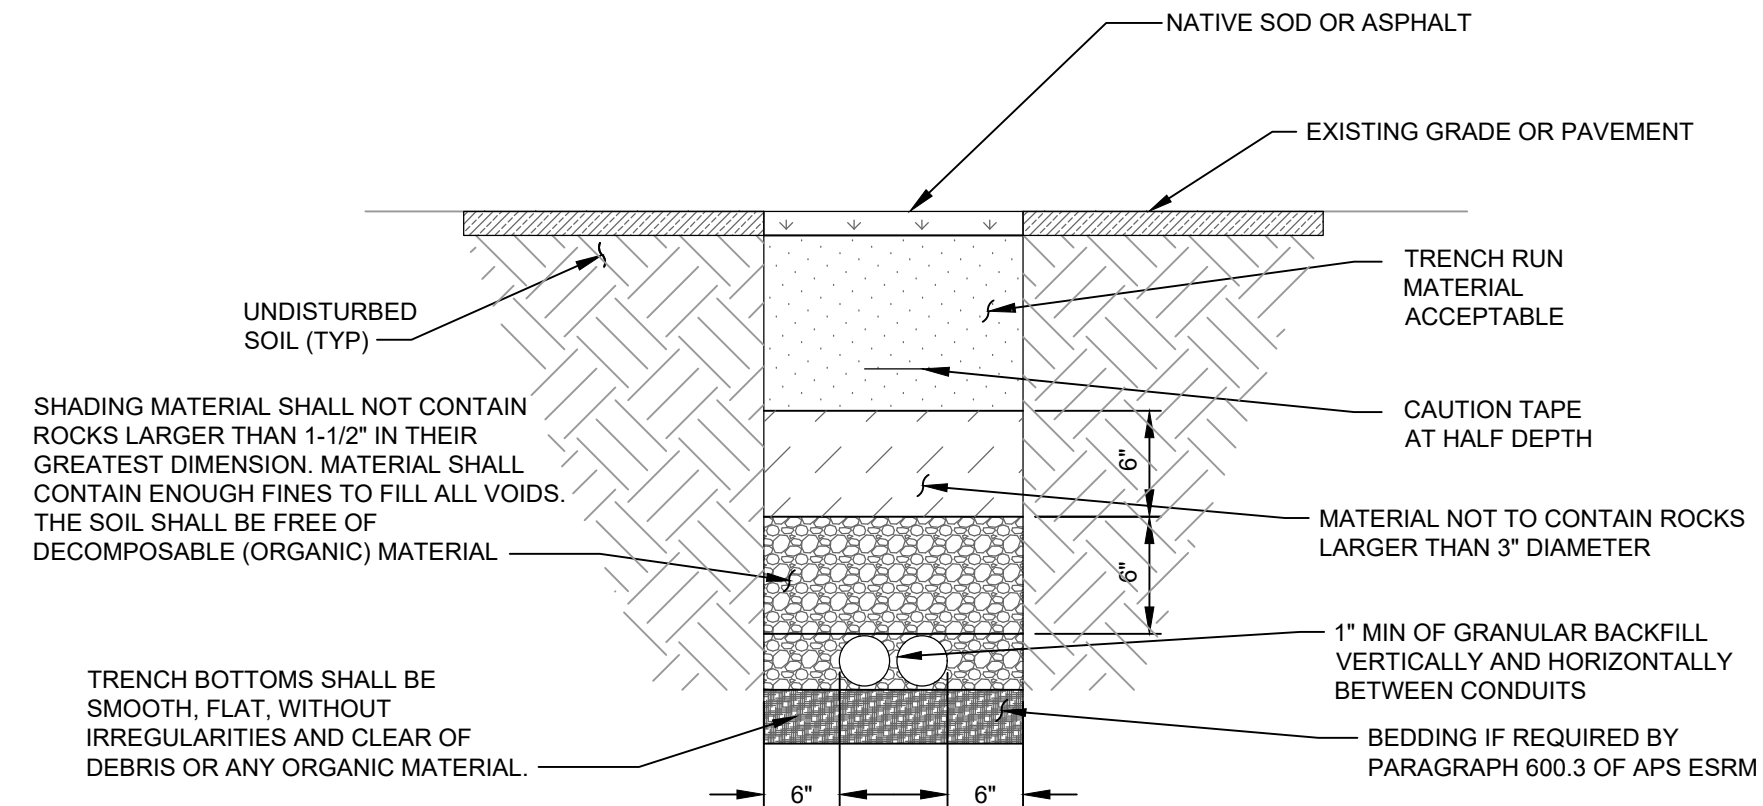


NOTES:

3. TRENCH REQUIREMENTS SHALL MEET THE STANDARDS PER APS ESRM.
2. ANY EXCAVATION LEFT OPEN NEEDS TO BE FENCED, BARRICADED, OR TRENCH PLATED TO INSURE THE SAFETY OF THE GENERAL PUBLIC.
3. TOTAL CONDUIT COVER IS REQUIRED TO BE 24" MIN. OR 6" BELOW FROST LINE PER LOCAL JURISDICTION REQUIREMENTS, WHICHEVER IS DEEPER.
4. DAMAGE DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR TO PRE CONSTRUCTION CONDITIONS OR BETTER.
5. EXACT NUMBER OF CONDUITS SHALL BE DETERMINED BY SHEET E600, EXACT CONDUIT PLACEMENT IN TRENCH SHALL BE DETERMINED BY THE CONTRACTOR IN THE FIELD BASED ON PHYSICAL MEASUREMENTS AND JURISDICTIONAL REQUIREMENTS.
6. BACKFILL SHALL BE PLACED IN LOOSE, LEVEL LIFTS NOT TO EXCEED 6-INCHES THICKNESS.
7. COMPACTION SHALL BE HAND-TAMPING WITH PNEUMATIC OR VIBRATING EQUIPMENT.
8. BACKFILL SHALL BE COMPACTED TO 85% OF MAXIMUM DENSITY FOR LANDSCAPED AREAS OR 95% OF MAXIMUM DENSITY FOR NON-LANDSCAPED AREAS AS DEFINED BY ASTM D-2922 AND D-3017.
9. CONTROLLED LOW STRENGTH MATERIAL (CLSM) MAY BE USED IN PLACE OF GRANULAR BACKFILL. CLSM SHALL CONFORM TO THE REQUIREMENTS OF THE DOT STANDARD SPECIFICATIONS.
10. ALL UTILITY CROSSINGS SHALL PROVIDE A MINIMUM 12 INCHES CLEAR VERTICAL SEPARATION AND MINIMUM 24 INCHES CLEAR HORIZONTAL SEPARATION PER THE APS ESRM.
11. FOR HMA SURFACE COURSE INSTALLATIONS, ASPHALT SHALL COMPLY WITH STANDARD DOT OR LOCAL JURISDICTION SPECS.
12. HMA MIX DESIGN SHALL MATCH EXISTING IN KIND. THICKNESS SHALL MATCH EXISTING OR 3 INCHES, WHICHEVER IS GREATER.

4 TRENCHING DETAIL

Scale: N.T.S

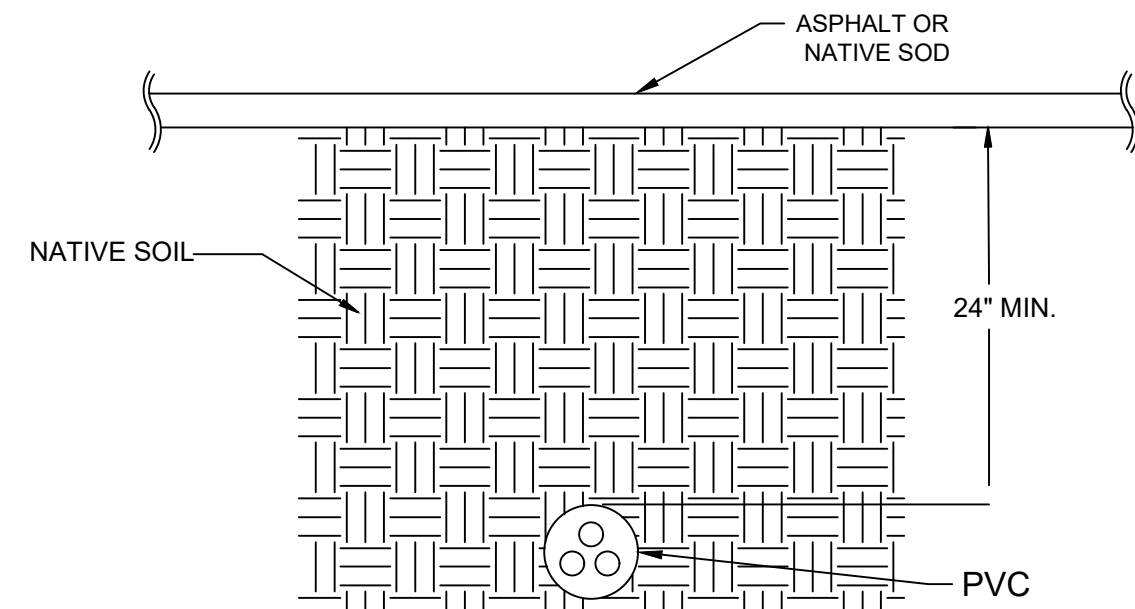

5 BOREHOLE DETAIL


Scale: N.T.S

NOTES:

1. MAINTAIN 12" MINIMUM CLEAR DISTANCE FROM ALL FOREIGN SYSTEMS.
2. HANDLE AND DISPOSE OF DRILL SLURRY.
3. BORING PIT SHALL NOT DISTURB EXISTING FOUNDATIONS.
4. BORING SUB CONTRACTOR SHALL SIZE THE PROPER BORE SLEEVE TO ACCOMMODATE THE CONDUITS SIZED PER THE DRAWINGS.
5. BORING SUB CONTRACTOR SHALL VERIFY BORE DEPTH AND ANGLES PRIOR TO CONSTRUCTION.

STAMP LOCATION

**BURNS
MCDONNELL**

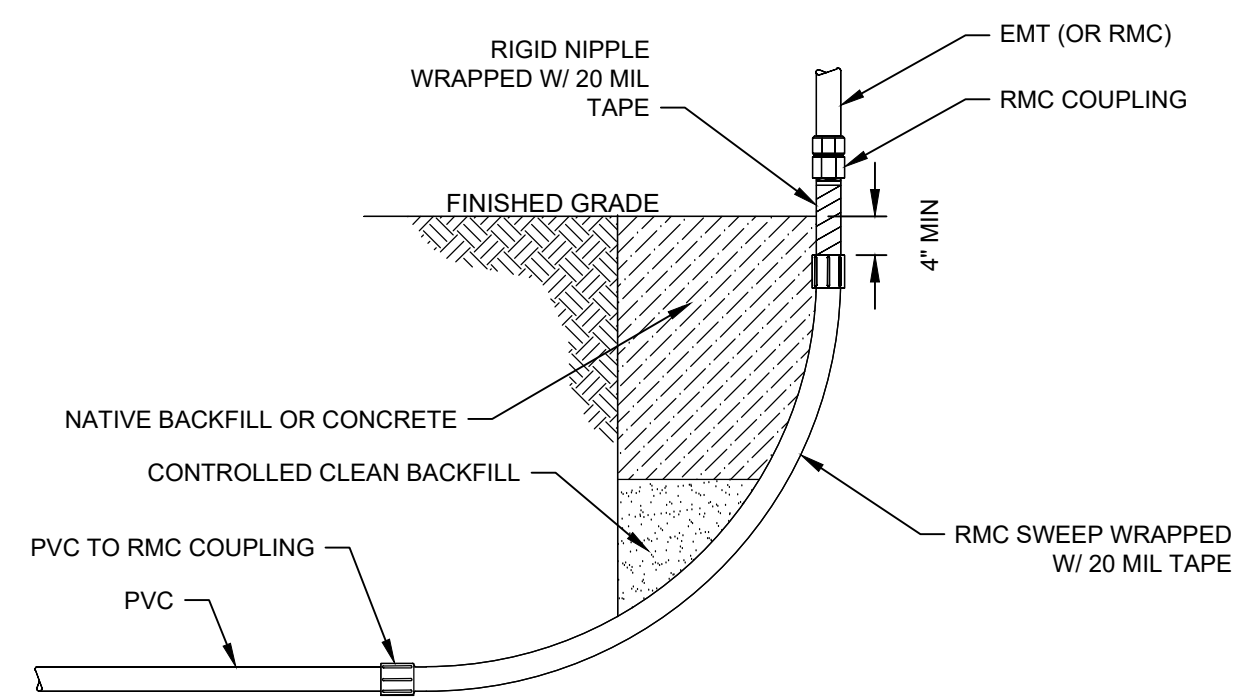

TRANSITION-RIGID SWEEP

Scale: N.T.S

Contact Arizona 811 at least two full working days before you begin excavation



Call 811 or click Arizona811.com

CITY OF SCOTTSDALE APPROVAL

CONTACT: LISA SCHAEFFER				
PHONE: 602-250-2049		PGR/MOBILE: 480-375-0975		
INSPECTOR: GREG DAVIS				
PHONE: -		PGR/MOBILE: 480-721-8390		
0	03/13/20	ISSUED FOR PERMIT		TJG
NO.	DATE	DESCRIPTION		BY
APS TAKE CHARGE - 112.5 KW, 120/208 V PERIMETER SCOTTSDALE PROPERTY, LLC 17600 N. PERIMETER DR. SCOTTSDALE, AZ 85255 ELECTRICAL DETAILS				
				
WO#: WA513145		DATE: DECEMBER 11, 2019		
BY: SR		SCALE: AS NOTED		
APS DWG #:		VENDOR #: E500		

Public Safety Line Permit
19
NCS

WARNING Hazardous voltage inside. Keep Out!	ADVERTENCIA Voltaje peligroso adentro. ¡Manténgase Alejado!
NOTICE Do Not Obstruct Access to this unit.	AVISO No Obstruya Acceso a esta unidad.

M99527





Initial Site Assessment: Preliminary Design




Project Site

APS-240602

Perimeter Scottsdale Property, LLC
17600 N. Perimeter Drive Scottsdale, AZ 85255

April 13, 2020

SITE ASSESSMENT - SCALE: 1" = 50'

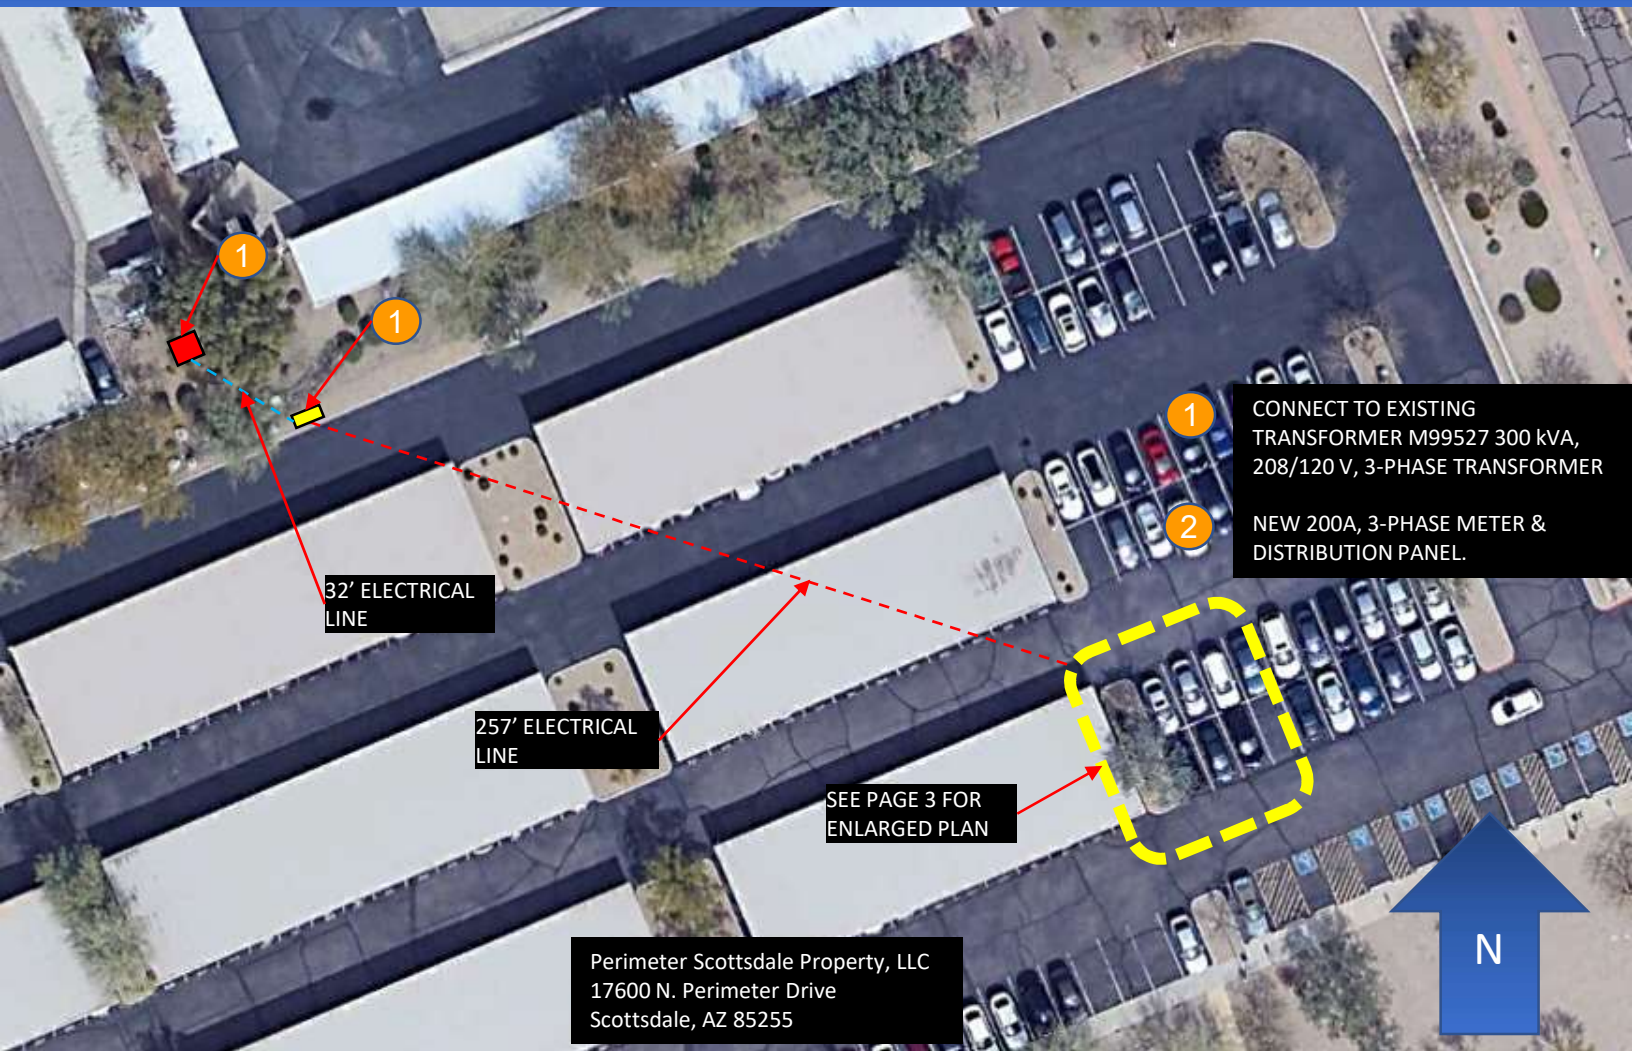

PROJECT SUMMARY

THE PROJECT INCLUDES THE LOCATION OF ONE (1) EV STALL GROUPING AREA CONSISTING OF THREE (3) STANDARD STALLS AND ONE (1) ACCESSIBLE PARKING STALL. NEW EV STALLS TO BE LOCATED ON THE NORTHEAST PARKING LOT OF THE PROJECT SITE. THE EV CHARGERS WILL BE SERVICED FROM AN EXISTING TRANSFORMER.

1. TOTAL PROPOSED EV STALLS = 4
 - A. STANDARD STALL = 3
 - B. ACCESSIBLE STALL = 1
 - C. STALLS LOST = 1
2. TOTAL EV CHARGING STATIONS = 4
 - A. DUAL PORT (PEDESTAL MOUNT) = 2
3. TOTAL LENGTH OF TRENCH/CONDUIT
 - A. LENGTH OF TRENCH/CONDUIT TO METER (TTM) = 32 FT
 - B. LENGTH OF TRENCH/CONDUIT BEHIND METER (BTM) = 257 FT
4. SITE WORK IMPACTS INCLUDE:
 - A. REMOVAL & REPLACEMENT OF EXISTING CURB, PAVEMENT, & LANDSCAPE
 - B. IMPACTS TO EXISTING UTILITIES TO BE VERIFIED DURING FINAL ENGINEERING
5. CONTRACTOR SHALL AVOID EXISTING TREES. TREES ARE TO REMAIN PROTECTED IN PLACE AND NOT REMOVED DURING CONSTRUCTION.

LEGEND

- ELECTRICAL SERVICE TO EVSE
- APS ELECTRICAL SERVICE
- NEW APS TRANSFORMER
- DUAL PORT EVSE (CLIPPER CREEK)
- 200A METER PANEL WITH SERVICE DISCONNECT SWITCH
- WHEEL STOP
- STANDARD EV STALL
- ACCESSIBLE EV STALL

SITE CONSTRAINTS

1. VEHICLE TRAFFIC WILL BE INTERMITTENTLY CONSTRAINED DURING INSTALLATION OF CONDUIT.
2. ACCESS TO PARKING STALLS ALONG CONDUIT LINE TO BE INTERMITTENTLY INACCESSIBLE DURING CONSTRUCTION
3. UTILITY HAS 24 HOUR ACCESS TO UNRESTRICTED ACCESS TO ALL EVSE COMPONENTS AND SERVICE ENTRANCE.

SITE ASSESSMENT - SCALE: 1" = 20'



1. TOTAL PROPOSED EV STALLS = 4
 - A. STANDARD STALL = 3
 - B. ACCESSIBLE STALL = 1
 - C. STALLS LOST = 1
2. TOTAL EV CHARGING STATIONS = 4
 - A. DUAL PORT (PEDESTAL MOUNT) = 2
3. TOTAL LENGTH OF TRENCH/CONDUIT
 - A. LENGTH OF CONDUIT TO METER (TTM) = 32 FT
 - B. LENGTH OF TRENCH/CONDUIT BEHIND METER (BTM) = 257 FT
4. SITE WORK IMPACTS INCLUDE:
 - A. REMOVAL & REPLACEMENT OF EXISTING CURB, PAVEMENT, & LANDSCAPE
 - B. IMPACTS TO EXISTING UTILITIES TO BE VERIFIED DURING FINAL ENGINEERING
5. CONTRACTOR SHALL AVOID EXISTING TREES. TREES ARE TO REMAIN PROTECTED IN PLACE AND NOT REMOVED DURING CONSTRUCTION.

LEGEND

- ELECTRICAL SERVICE TO EVSE
- APS ELECTRICAL SERVICE
- NEW APS TRANSFORMER
- DUAL PORT EVSE (CLIPPER CREEK)
- 200A METER PANEL WITH SERVICE DISCONNECT SWITCH
- WHEEL STOP
- STANDARD EV STALL
- ACCESSIBLE EV STALL

SITE CONSTRAINTS

1. VEHICLE TRAFFIC WILL BE INTERMITTENTLY CONSTRAINED DURING INSTALLATION OF CONDUIT.
2. ACCESS TO PARKING STALLS ALONG CONDUIT LINE TO BE INTERMITTENTLY INACCESSIBLE DURING CONSTRUCTION
3. UTILITY HAS 24 HOUR ACCESS TO UNRESTRICTED ACCESS TO ALL EVSE COMPONENTS AND SERVICE ENTRANCE.

Attachment 1: Existing Transformer Loading Evaluation



Existing Load Evaluation	
Peak Month	Sep-19
Peak Load (kW)	89.0
Proposed Added Load (kW)	26.6
Total New Load (kW)	115.6
Power Factor (pf)	0.85
Total Usage (kVA)	136.0
Transformer Voltage (V)	208/120
Current Transformer Size (kVA)	300
Transformer Peak Load Percentage	45%

PHASESPRESENT	3/Phase present
HIGHSIDEVOLTAGE	12470 Volts
LOWSIDEVOLTAGE	120-208 Volts
HIGHSIDECONNECTION	Floated Wye
LOWSIDECONNECTION	Delta Connected
TAPSETTING	Two Up and Two Down
TEXT	M99527 300,ABC

- Electrical Equipment to be Installed:**
- A. Connect to existing 300 kVA transformer M99527.
 - B. Install 208/120V, 200A, 3 phase meter panel, disconnect, and breaker panel.

Conclusion

- Existing transformer is sufficient to support this Take Charge project.

Customer Acceptance Package
(CAP)



Application Number: APS-240602

Property/Company Name:
Perimeter Scottsdale Property
LLC

Address: 17600 N. Perimeter
Drive
Scottsdale, AZ 85255

Perimeter Scottsdale Property LLC
17600 N. Perimeter Drive
Scottsdale, AZ 85255

Congratulations! We are pleased to inform you that Perimeter Scottsdale Property LLC has been selected to participate in Arizona Public Service's Take Charge electric vehicle (EV) charging program. Upon your completion of the actions listed below, we will move into final engineering and begin planning for construction to install charging for four of your parking spaces at 17600 N. Perimeter Drive, Scottsdale, AZ 85255.

Customer Action Items:

- ✓ *Customer Agreement (Terms & Conditions)*
- ✓ *Conceptual Design for Approval*
- ✓ *Charger Selection Indication*
- ✓ *Owner Authorized Agent Form*

Please return your Customer Acceptance Package by April 27, 2020. Availability in the Take Charge program is limited, and site participation will be secured on a first-come, first-served basis, project feasibility and completion of the required documentation including, but not limited to the contents within..

You are taking an exciting step toward helping reducing harmful greenhouse gas emissions in our region.

We are here to help and happy to address any questions or concerns. Please feel free to contact me should you have any questions.

Sincerely,

Dina Radowick
Take Charge AZ Program
Dina.Radowick@aps.com

Welcome to Take Charge AZ

Table of Contents

✓ *indicates customer action required*

1. Customer Agreement ✓
2. Conceptual Design Approval ✓
3. Charging Station Selection ✓
4. Owner Authorized Agent form ✓

Customer Agreement

✓ *Customer Action Required*

A fully executed Customer Agreement for the Take Charge Program is required to proceed further with program participation. Our records indicate that we have not yet received your signed agreement at this time. Please review the agreement, sent as a separate attachment and return as soon as possible.

Conceptual Site Design Customer Approval

✓ *Customer Action Required*

By signing below, the Customer (program participant) agrees to the basic design layout of Electric Vehicle charging stations including all equipment, number of stalls, stall locations, and the location of the proposed meter and transformer (if required), as shown on the subsequent pages of this document.

Customer Approval of the conceptual design allows Arizona Public Service to move forward with Final Engineering, permitting and planning for construction for your site.

Signature:



Print Name:

GAIL LUBIN

Title :

Property Manager

Date:

April 13, 2020

Conceptual Site Design

Premier Scottish Lake Property, LLC

27600 N. Fennelwood Drive Scottsdale, AZ 85255

NOTE: COMMUNICATIONS - 20.000.000 = 20' or 20"



- [illegible]

DISCUSSION

- Last Name different (2)
- Address different
- Age not 18-24 years
- Date of birth not correct
- Value different, or different address
- Name not
- Employment of
- Employment of

NOTE: C. SPANISH/ITALIAN/73

1. VEHICLE TRAFFIC WILL BE REDUCED/STOPPED DURING INSTALLATION OF CONDUIT
2. ALL OTHER COMMERCIAL VEHICLES MUST STOP TO BE REDIRECTED TO ALTERNATE ROUTES DURING CONSTRUCTION
3. STAFF WILL BE ASKED TO REMAIN IN VEHICLES TO AVOID ACCIDENTS DURING CONSTRUCTION

Please Indicate Charger Selection

✓ *Customer Action Required*



CLIPPERCREEK
RELIABLE. POWERFUL. MADE IN AMERICA

HCS-D40 Dual Charging Station



Features:

- 7.7kW of power to charge two electric vehicles quickly
- Fully sealed NEMA 4 station enclosure for indoor or outdoor installation
- Integrated cable wrap making storing the cable simple and convenient
- Two 25-foot charging cables for installation flexibility and superior vehicle reach
- Two SAE J1772 universal connectors, suitable for charging all electric vehicles in the US
- Connectors feature a field-replaceable latch and accommodate a specially sized padlock for security (padlocks included)
- Two wall or pedestal mount SAE J1772 connector holsters included
- Operating temperatures: -22°F to 122°F (-30°C to 50°C)
- 3-year warranty
- Excellent customer service and support from the outstanding Clipper Creek customer service team
- No assembly required
- Made in America
- ETL Safety Certified



—chargepoint—

CT4021 Dual Charging Station



Features:

- **Energy Management:** Lower both installation and electricity costs with advanced energy management tools such as panel sharing and scheduled charging.
- **Speed:** Our Level 2 Commercial chargers charge at a maximum rate of 25 RPH (miles of Range Per Hour). CT4000 stations can fully charge some vehicles in less than four hours.
- **The Network Effect:** The ChargePoint network and our cloud-based services give you access to the largest community of EV drivers and the flexibility and control you need to serve your drivers.
- **Clean Cord Technology:** Keep cords safely off the ground with a self-retracting, maintenance-free, ultra-lightweight cord management system.
- **Safe and Reliable:** CT4000 stations are UL listed, meeting the stringent requirements of the nation's leading safety standards organization.
- **Best-in-Class Hardware:** CT4000 stations are rugged and built to withstand the elements. They can be installed outdoors or indoors.
- **Smart, Networked Charging:** Receive automatic software updates that deliver the latest improvements and features. Remotely monitor, manage and configure stations. You can also get real-time station information, track the charging status of all vehicles with Valet and generate automated reports.

✓ Customer Action Required

Owner Authorized Agent Form

I, Gail Lubin, hereby authorize APS to act as my agent in all documents/forms as it relates to obtaining Agency permits for the installation of Electrical Vehicle Charging Systems at the property listed below.

Property Address:

17600 N. Perimeter Drive
Scottsdale, AZ 85255

Agent Name, Address, & Telephone Number:

Torrey Graf for

Burns & McDonnell

1850 N. Central Ave., Suite 800 Phoenix, AZ 85004

480-337-6523

Property Owner Name, Address, & Telephone Number:

Perimeter Scottsdale Property, LLC
c/o Signature Real Estate Services, Inc.
8712 E. Via de Commercio, Suite 10
Scottsdale, AZ 85258

Signature: 

Date: April 13, 2020